


Mini Pile Driver SPD13

Suitable for foundation work in a confined space and an urban area

- With a compact structure, low-noise, low-vibration pile drive can be achieved with the ZX120 as a base machine.
- The foldable leader makes it easy to transport the machine in a narrow space.
- Applications range from pressing steel pipes into the ground to reclamation without changing an auger.

Specifications

Unit: mm

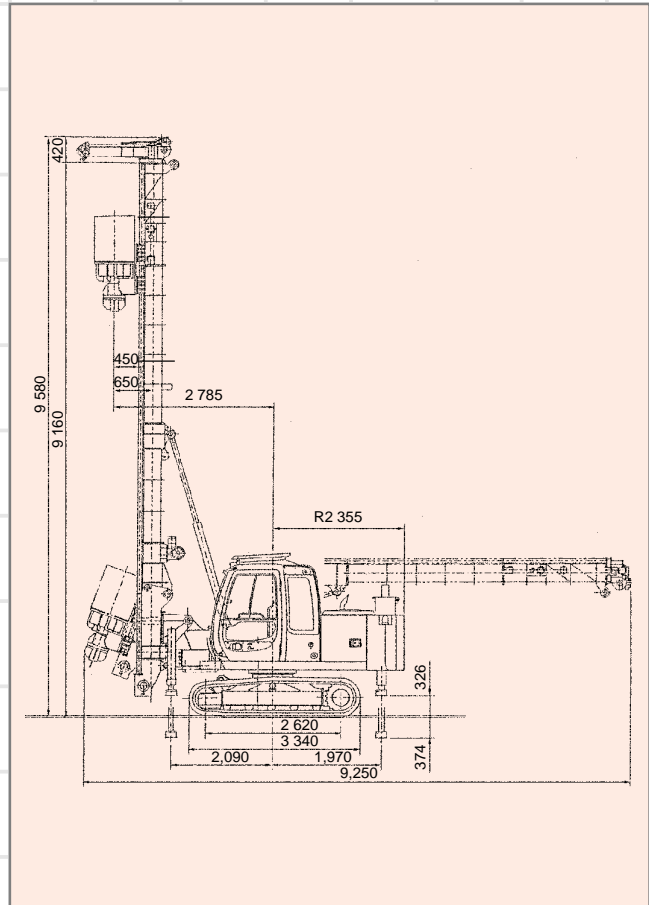

Specifications

Type	SPD13		
Operating Weight	kg	13 720	
Ground pressure (average)	kPa(kg/cm ²)	51.0 (0.52)	
Engine	Model	Isuzu CC-4BGITC	
	Rated output	63/2 100 (85/2 100)	
Hyd. auger	Type	Hydraulic auger with 5-speed selector	
	Rotation speed	min ⁻¹ (rpm)	6.9~84 (6.9~84)
	Torque	kN•m(tf•m)	2.9~59 (0.3~6.0)
	Rise/fall speed	m/min	0~5.8
Rise/fall force	kN(tf)	71.3 (7.0)	
Winch	Line pull	kN(tf)Xm	19.6 (20) X 30
	Rope diameter	mm	10

<Note> Data shown above are in SI units, followed by data in conventional units in ().

- 5m and 7m Short-head leaders are optionally available.