

B25D 6x6

**ARTICULATED
DUMP TRUCK
Mk VI**



Gross Power: 205 kw (275 hp)
Gross Torque: 1 000 Nm (735 lbft)
Rated Payload: 23 200 kg (51,147 lbs)

BELL

B25D DUMP TRUCK MkVI

ENGINE Mercedes Benz inline 6 cylinder, turbocharged, intercooled, low emission diesel engine

Gross power 205 kW (275 hp) @ 2 200 rpm
 Net Power 198 kW (265 hp) @ 2 200 rpm
 Gross torque 1 000 Nm (736 lbf) @ 1 200 -1 600 rpm
 Net torque 970 Nm (714 lbf) @ 1 200 -1 600 rpm

Displacement 6,37 litres (389 cu.in)
 Fuel tank capacity 340 l (90 US gal)
 Auxiliary Brake Exhaust brake
 Engine Valve Brake (EVB)

Certification OM 906 LA.111/4-00 meets Europe (EU) step2;
 Regulated OM 906 LA.E3A/1 meets Europe (EU) step 3

TRANSMISSION Engine mounted, fully automatic ZF planetary transmission with six forward gears and one reverse gear. Hydrodynamic with lock-up in all gears.

Torque Converter 6HP592C Ecomat 2 plus Electronic

Model Control Type

TRANSFER BOX Remote mounted

Manufacturer VGR
 Model 13100
 Layout Three in-line helical gears.
 Output Differential 67/33 torque proportioning, Pneumatically lockable on the move.

AXLES High strength steel fabricated with spiral bevel type gears on the limited slip locking differential and heavy duty outboard planetary gears.

Model Bell 15T

BRAKING SYSTEM

SERVICE BRAKE Dual circuit, full hydraulic actuation caliper brakes on all wheels
 Maximum brake force 164 kN (36,900 lbf)
PARK & EMERGENCY Spring applied, air released driveline mounted disc.
 Maximum brake force 396 kN (89,000 lbf)
AUXILIARY BRAKE Automatic exhaust brake and Engine Valve Brake (EVB)
 Variable Adjustable Hydraulic Retarder
 Maximum retardation 442 kW (593 hp)



WHEELS Earthmover
 Tyre 23.5R25

FRONT SUSPENSION Semi-independent, quad rubber mounted leading arm linkages supported by nitrogen and oil filled struts.

REAR SUSPENSION Pivoting walking beams, distributing equal load through laminated rubber suspension blocks. Each axle is coupled to the chassis by four rubber-bushed links for ideal vertical movement.

HYDRAULIC SYSTEM Variable displacement with load sensing system incorporating a ground driven emergency steering pump.
 Flow 184 l/min (48.6 gal/min)
 Pressure 25 Mpa (3915 psi)
 Filter 5 micron

STEERING SYSTEM Hydrostatically actuated, low effort, fast acting.
 Two double-acting steering cylinders
 Lock to lock turns 4.1

Steering Angle +-45°

DUMPING SYSTEM Two double-acting, single stage, dump cylinders
 Raise Time 12 s
 Lowering Time 6 s
 Tipping Angle 70°

PNEUMATIC SYSTEM Air drier with heater and integral unloader valve, serving park brake and auxiliary functions
 System Pressure 810 kPa (117 psi)

ELECTRICAL SYSTEM
 Voltage 24 V
 Battery Type Two maintenance free permanently sealed
 Battery Capacity 2 X 105 Ah
 Alternator Rating 28 V 80 A

VEHICLE SPEEDS	1st	8	5
	2nd	13	8
	3rd	22	14
	4th	31	19
	5th	44	28
	6th	53	33





B25D 6x6 ARTICULATED DUMP TRUCK

MKV



LOAD CAPACITY & GROUND PRESSURE

WEIGHTS			GROUND PRESSURE			LOAD CAPACITY		
UNLADEN	kg	lbs	UNLADEN	kPa	psi	BODY	m³	cu.yd
Front	9,620	21,208	Front	226	3.5	Struck Capacity	11	14.4
Middle	4,420	9,744	Middle	169	6	SAE 2:1 Capacity	14	18.3
Rear	4,360	9,612	Rear	169	6	SAE 1:1 Capacity	18	23.5
Total	18,400	40,565	Total			SAE 2:1 Capacity with Autogate	14,5	19
LADEN			LADEN					
Front	12,860	28,351	Front	245	35.5			
Middle	14,400	31,747	Middle	285	41.3	Rated Payload	23 200 kg	51,147 lbs
Rear	14,340	31,614	Rear	285	44			
Total	41,600	91,712						

GRADEABILITY/RIMPULL

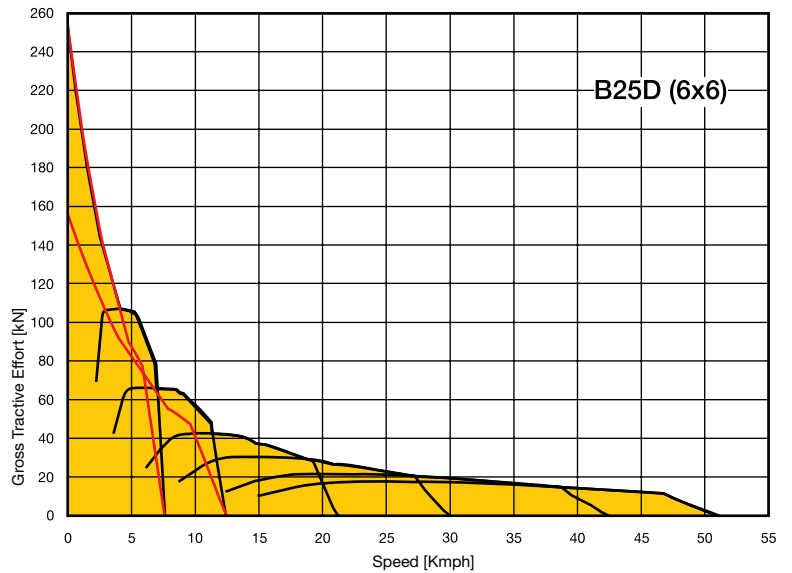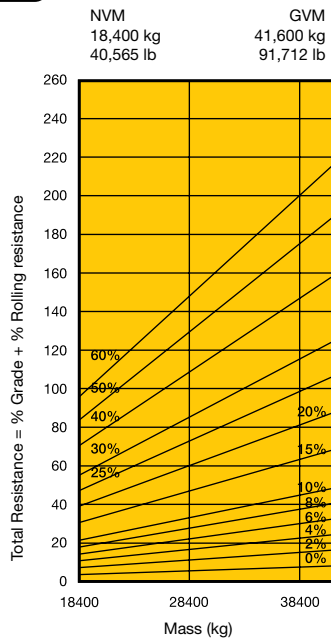

RETARDATION

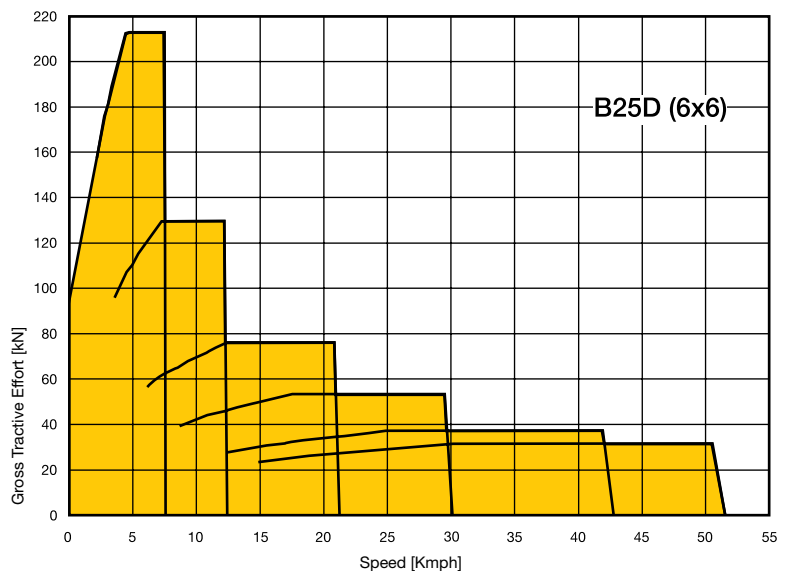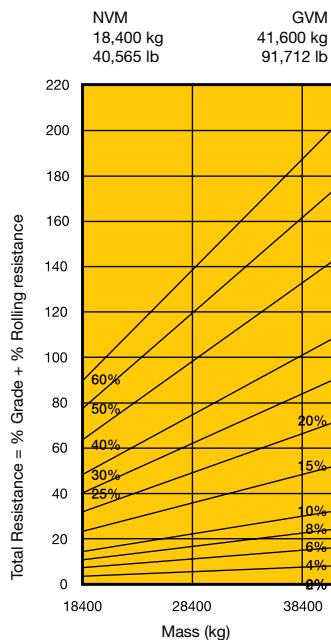

B25D 6x6 ARTICULATED DUMP TRUCK

MkVI

AVAILABLE EQUIPMENT*

Cab

- ROPS/FOPS certification
- Protective rear window guard
- Tilt cab for service access
- Gas strut supported door
- Tinted safety glass
- Sliding windows
- Rear view mirrors - regular and wide angle
- Sun visor
- Wiper/washer with intermittent control
- Tilt and telescoping steering wheel
- Adjustable, air suspension seat with retractable seat belt
- Fold-away trainer seat with retractable seat belt
- HVAC climate control system with filtered and ducted air
- Rotating beacon
- 12 V power outlet/12 V cigarette lighter
- Ash tray
- Drinks holder
- Cooled/heated lunch box
- I-Tip programmable bin tip
- Sound insulated to 76 dB(A) to ISO 6396
- Radio/CD/Tape
- Memory Module
- Air horn

MDU Features

- Operator / Site selected speed control
- Tipping counter
- Trip timer
- Trip distance
- Transmission gear selection
- Fuel Consumption
- Diagnostics
- Intermittent wiper timing control
- Speedo calibration for alternative tyre sizes
- Metric /Imperial unit selection
- Warning lights with audible buzzer

Gauges

- Engine coolant temperature
- Engine oil pressure
- Transmission oil temperature
- Fuel
- Tachometer
- Battery voltage
- Hourmeter
- Odometer
- System air pressure

Vehicle

- Ground driven emergency steering
- Bin safety prop
- Articulation lock
- Integral transmission output retarder with 6 settings

Other

- (Factory or field installed)
- On Board Weigh System (OBW)
 - Electrically adjustable rearview mirrors - one per side
 - Groeneveld auto greasing system
 - Retractable sun visor
 - Exhaust body heating
 - Autogate
 - Body liners
 - Fleetmatic Satellite Monitoring System
 - Driver ID and immobiliser
 - Forward working lights
 - Artic reverse light
 - Fuel heater
 - External windshield visor
 - Headlight protection grills
 - Rear window wiper
 - Antenna mounting bracket
 - System for reverse camera
 - Wiggins quick fuelling system
 - Tyre pressure monitoring

*standard specification for machines may vary according to region



What makes the B25D a great performer...

- **With a highly efficient power and drivetrain combined with low rolling resistance, the Bell B25D delivers superior fuel efficiency**
- **High performance engine with increased power and torque and long service intervals**
- **Powerful hydraulic transmission retarder drastically cuts brake use extending pad life up to a factor of five**
- **Fewer scheduled service requirements**
- **Supreme driver comfort from a nitrogen over oil strut independent suspension system**
- **Deluxe cab - setting new standards in comfort, sound levels and simplicity in operation**
- **Tight turning circle**
- **Electronic component protection**
- **Easy service access**
- **Fast tip cycles**
- **Low ground pressure to work jobs other trucks can't**

CablePrice (NZ) Ltd
3 Tunnel Grove, Petone
Wellington, New Zealand

Phone: 0800 555 456

Email: sales@cableprice.co.nz | www.cableprice.co.nz

All dimensions are shown in millimetres, unless otherwise stated between brackets.
Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. Photographs featured in this brochure may include optional equipment.

**Strong Reliable Machines
Strong Reliable Support**

BELL