

# CANTER 816

DUONIC AMT OR MANUAL

2019 MODEL  
ADVANCED  
SAFETY  
SYSTEMS



GVM:  
7,500kg



Power/Torque:  
110kW/370Nm



Wheelbase:  
3,850mm (G)

- Electronic Brake System **NEW**
- Electronic Stability Control **NEW**
- Active Emergency Braking System **NEW**
- Lane Departure Warning System **NEW**
- 5yr/200,000km warranty **NEW**
- 30,000km service intervals

# SPECIFICATIONS - CANTER 816

## MODEL

4x2 816	WIDE CAB	6 SP.	AMT	FEB71GR3SFBC
4x2 816	WIDE CAB	5 SP.	MAN	FEB71GR4SFBC

## WHEELBASE (mm)

3,850 (G)
3,850 (G)

## GVM (kg) (optional)

7,500 (5,995)
7,500 (5,995)


## GCM (kg) (optional)

11,000 (9,500)
11,000 (9,500)

## ENGINE

Engine Version	FUSO 4P10-T4 Euro 5 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Type	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3 litre (2998cc)
Power (DIN)	110kW @ 2840~3500rpm
Torque (DIN)	370Nm @ 1350~2840rpm
Maximum Engine Speed	4100rpm
Compression Ratio	17.5:1
Cooling System / Oil Cooler	Water cooled with Viscous fan, 13.7L capacity. Engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9
Emission Level	EURO 5 (ADR 80/03) and EEV rated (Enhanced Environmentally-Friendly Vehicle)

## 4P10-T4

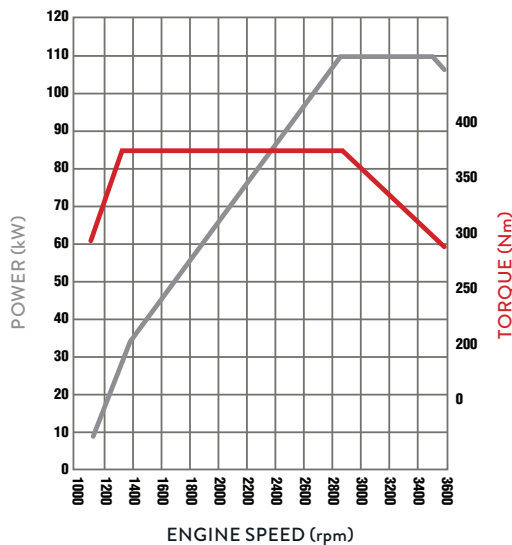

## FUEL

Injection System	Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity (L)	100
Filtration	Filter with Water Separator and Indicator Sensor

## ELECTRICAL

Voltage	12V Negative Earth
Alternator Capacity	12V-110 amp
Battery Specification	Heavy Duty 115D31L x 2
Headlamp Type	Halogen 2 x 55W/60W
Fog lamp in bumper	Standard

## CLUTCH

	<b>DUONIC AMT</b>	<b>Manual</b>
Clutch Model	DUONIC Automated Manual (no clutch pedal)	FUSO C4W30
Type	Dual Clutch (Wet Multi-plate)	Single Dry Plate, Direct Hydraulic Type, 300mm

## TRANSMISSION

	<b>DUONIC AMT</b>	<b>Manual</b>
Version	FUSO DUONIC M038S6	FUSO M038S5
Type / Speeds	6 Speed Automated Manual with Auto and Manual Modes	5 Speed with In-Dash Gearshift Lever
Features	Virtually Instant Gear Changes, In-Dash Gear Lever with Park Brake Position, ECO Mode to Minimise Fuel Usage	Synchromesh 2nd-5th
Ratios	1st: 5.397 2nd: 3.788 3rd: 2.310 4th: 1.474	5th: 1.000 6th: 0.701 Rev. 5.397
PTO Opening	LH Side	LH Side

## FRONT AXLE

Axle Version	FUSO F350T "I" Beam
Design Capacity (kg)	3,100
Max Operating Capacity (kg)	3,100

## FRONT SUSPENSION

Type	Taper leaf spring with Stabiliser Bar and Double Acting Shock Absorbers
Size (mm)	1,150 x 70

## REAR AXLE

Axle	FUSO D035 Full Floating Banjo
Ratio	DUONIC 5.714:1 Manual 5.285:1
Design Capacity (kg)	6,000
Max Operating Capacity (kg)	6,000

## REAR SUSPENSION

Type	Steel Suspension
Details	Multi leaf spring with Stabiliser Bar and Double Acting Shock Absorbers
Size Main Leaves (mm)	1,250 x 70
Size Helper Leaves (mm)	880 x 70

## STEERING

Power Assisted	Tilt / Telescopic Adjustable Steering Wheel
----------------	---

## BRAKES

Type	Hydraulic Dual Circuit with Front and Rear Twin Caliper Disc Brakes
Size Front / Rear (mm)	310 x 40
Features	ABS + EBD + EBS Exhaust Brake Brake Priority System
Park Brake	Transmission Mounted

# SPECIFICATIONS - CANTER 816

2019 MODEL  
ADVANCED  
SAFETY  
SYSTEMS

## WHEELS AND TYRES

Wheel Size	17.5x6.0-127
Tyre Size All	215 / 75R17.5
Spare Tyre Carrier	Yes

## CHASSIS

Size (mm)	192 x 60 x 6
-----------	--------------

Refer to the bodybuilders guidelines on the Fuso website ([www.fuso.co.nz](http://www.fuso.co.nz)) before mounting a body or modifying the chassis

## INSTRUMENTS

Gauges	Speedometer with Odometer Tachometer Fuel Level Water Temperature
Colour Information Display	Fuel Consumption DPF Bar Chart from 1~9 Water Temperature Maintenance Reminder System Date and Time Tripmeters x 2

## STANDARD FEATURES

Cab Cooling and Heating	Air Conditioner / Heater / Demister
Accessory Power	12V Accessory Power Outlet / Cigar Lighter
Driving	Keyless Central Locking Electric Windows
Storage	Dual Overhead Storage Pockets In-Dash Centre Document Storage Door Storage Pockets Lockable Glove Box

## CAB FEATURES

Type	All Steel Forward Control Fixed Cab
Mounting	Hydroelastic 4 Point
Colour	Natural White (W31)
Interior	Fully Trimmed cab with vinyl floor covering
Seating Capacity	3
Seat (driver)	Heavy Duty Suspended with LH Arm Rest Adjustable Lumbar Support and Weight Adjustment
Seats (passenger)	Flat Folding, 2 Passenger Bench

## SERVICE INTERVALS

30,000km / 12 months

Vehicles operating in harsh environments may be subject to reduced service intervals.

## WARRANTY

5 years / 200,000km

Simply have your vehicle serviced at an authorised FUSO Service Centre, at the recommended servicing intervals, and you are covered by an additional 2 year / 100,000km FUSO warranty on top of the first 3 years / 100,000km. That's a total of 5 years / 200,000km cover. Refer to terms and conditions in the FUSO warranty booklet for full details.

**NEW**

## SAFETY FEATURES

### ACTIVE SAFETY FEATURES

Electronic Brake System (EBS)	Yes	<b>NEW</b>
Electronic Stability Control (ESC)	Yes	<b>NEW</b>
Active Emergency Braking System (AEBS)	Yes	<b>NEW</b>
Lane Departure Warning System (LDWS)	Yes	<b>NEW</b>

### CAB

Structure	ECE R-29 Reinforced Cab Side Intrusion Bar
Airbags	Driver's (steering wheel) Passenger's (dashboard) <b>NEW</b>
Seatbelts	ELR 3-Point (+ height-adjustable with pre tensioner for driver) Lap Belt (centre passenger)
Driver's Seat	Spring-suspended
Steering Wheel	Energy-absorbing Adjustable (height and reach)
Rearview Mirrors	Heated
Fog Lamps	Yes
Keyless Central Locking	Yes
7" Touchscreen Media Unit	AM/FM/DAB + USB + AUX <b>NEW</b> Apple CarPlay and Android Auto Wi-Fi enabled for Internet Radio Bluetooth 32GB capacity storage HD Reverse Camera included †

### CHASSIS

Speed Limiter	Yes (activated and adjustable by FUSO dealer)
Anti-Lock Braking System (ABS)	Yes
Anti-Slip Regulator (ASR)	Yes
Electronic Brake Force Distribution (EBD)	Yes
Disc Brakes	Auto-Adjusting, 4 Wheel Dual Caliper
Brake Priority System	Yes
Exhaust Brake	Yes
Hill Start Assist	Yes (adjustable engagement on manual transmission)
Reverse Warning Buzzer	Yes
Anti Roll Bar	Yes
Brake Wear Indicator	Yes

### OPTIONS

† Additional Multimedia Display Cameras (up to 4)
Truck Specific GPS Navigation
Reversing Sensors
Tyre Pressure Monitoring System
Wireless Phone Charge Pocket

## KERB WEIGHTS AND MAX AXLE LOADS (kg)

Model		Vehicle Ratings**		Max Axle Loadings**		Kerb Weights*		
		GVM	GCM	Front	Rear	Front	Rear	Total
4x2 816 Wide Cab 6 Sp. AMT	FEB71GR3SFBC	7,500	11,000	3,100	6,000kg	1,610	835	2,445
4x2 816 Wide Cab 5 Sp. MAN	FEB71GR4SFBC	7,500	11,000	3,100	6,000kg	1,595	830	2,425
4x2 616 Wide Cab 6 Sp. AMT	FEB71GR3SFBC(D)	5,995	9,500	3,100	6,000kg	1,610	835	2,445
4x2 616 Wide Cab 5 Sp. MAN	FEB71GR4SFBC(D)	5,995	9,500	3,100	6,000kg	1,595	830	2,425

\* Weights (est.) includes 10L fuel and spare wheel and are subject to 2.5% variation (+/-)

\*\* Vehicle ratings and max axle loadings may be limited by local regulations.


# SPECIFICATIONS - CANTER 816

## PERFORMANCE

	DUONIC AMT	Manual
Turning Circle (kerb to kerb - metres)	13.6	13.6
Road Speed (km/h) at Max Engine Speed	127	127
Engine Speed (rpm) at 90km/hr (top gear)	2535	2420
Gradeability at Rated GVM (theoretical)*	31%	31%
<b>Notes</b>	*This is theoretical performance only. Actual performance may vary under different conditions	

## DIMENSIONS (mm)

Wheelbase	3,850
Length Overall	6,685
Height Overall	2,185
Width Overall	2,030
Width Rear Axle	2,030
Width Front Track	1,675
Width Rear Track	1,560
Width Frame	750
Height Frame at Rear Axle	797

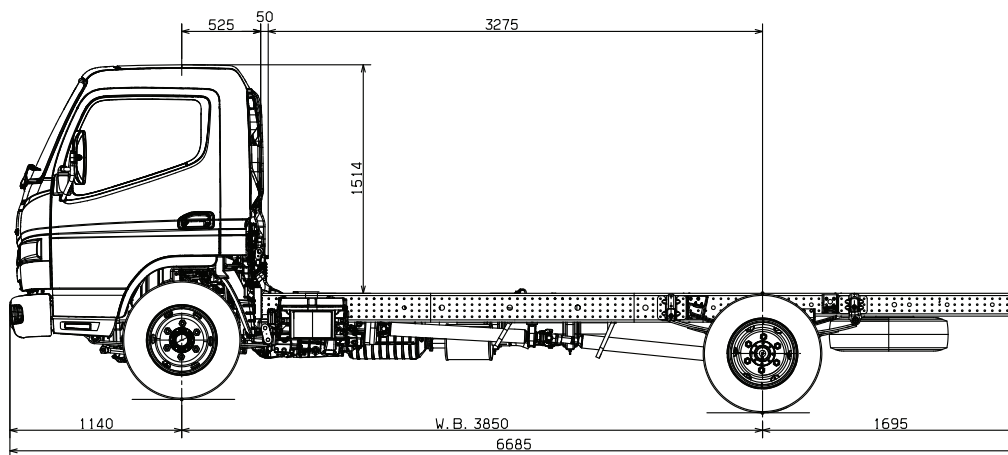

**CANTER 816 – 'G' WHEELBASE**

1000  
UNIT: mm 20mm = 1000mm

Scale = 1:50 (20mm = 1 metre). This scale is accurate when used on the original spec sheet, be aware that enlarging these illustrations can alter the scale and cause incorrect measurements. Fuso New Zealand and its authorised dealers always recommend customers seek professional advice from independent sources before commencing any engineering activities.

A policy of continual improvement means that specifications detailed in this brochure are subject to change without notice. Contact your authorised Fuso dealer to confirm current specifications. Fuso is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © Fuso NZ (2017)