



ISUZU **RED TECH**™

Reliable. Eco-friendly. Durable. Technologically Advanced

4 SERIES


Dependable Power

4LE2T - 40 HP (30 KW) @ 1800 RPM (constant speed)
48 HP (36 KW) @ 2400 RPM (variable speed)

4LE2X - 66 HP (49 KW) @ 1800 RPM (constant speed)
62 HP (46 KW) @ 2400 RPM (variable speed)

FOR MOVERS

(not shakers)

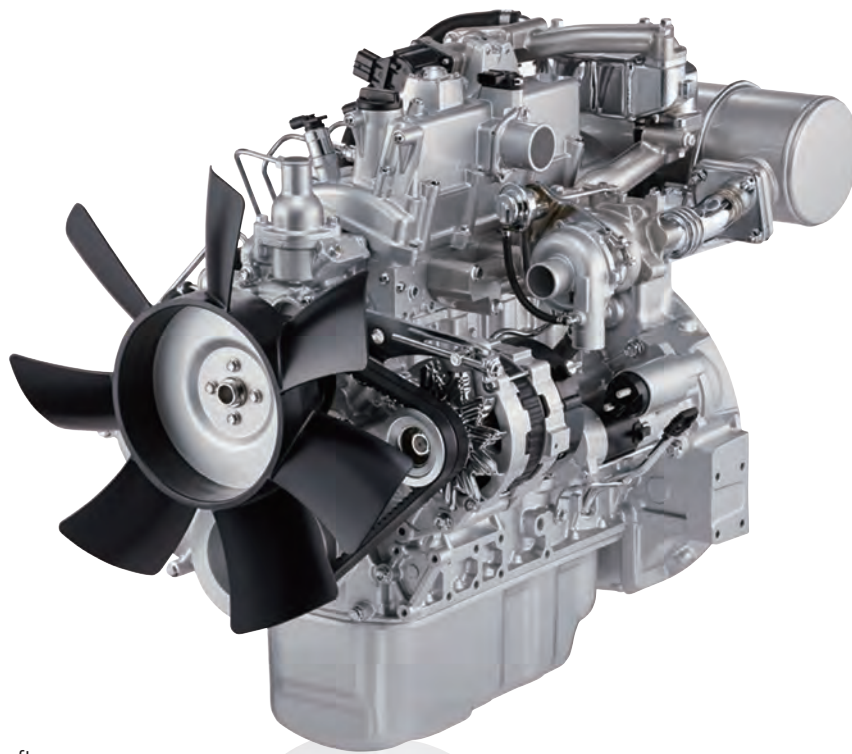

High technology exhaust after treatment provides the ideal level of applied simplicity and end user satisfaction **for those on the move.**

Certifications

U.S. EPA Tier **4**
EU Stage **III B**

isuzuengines.com



- Agricultural
- General Industrial
- Marine
- Eco-Friendly
- Automotive
- On Road Heavy Duty


Applications

- AWP
- Water Pump
- Hydraulic Pump
- Refrigeration
- Generator
- Asphalt Paver
- Irrigation



Performance

Engine Performance Curves

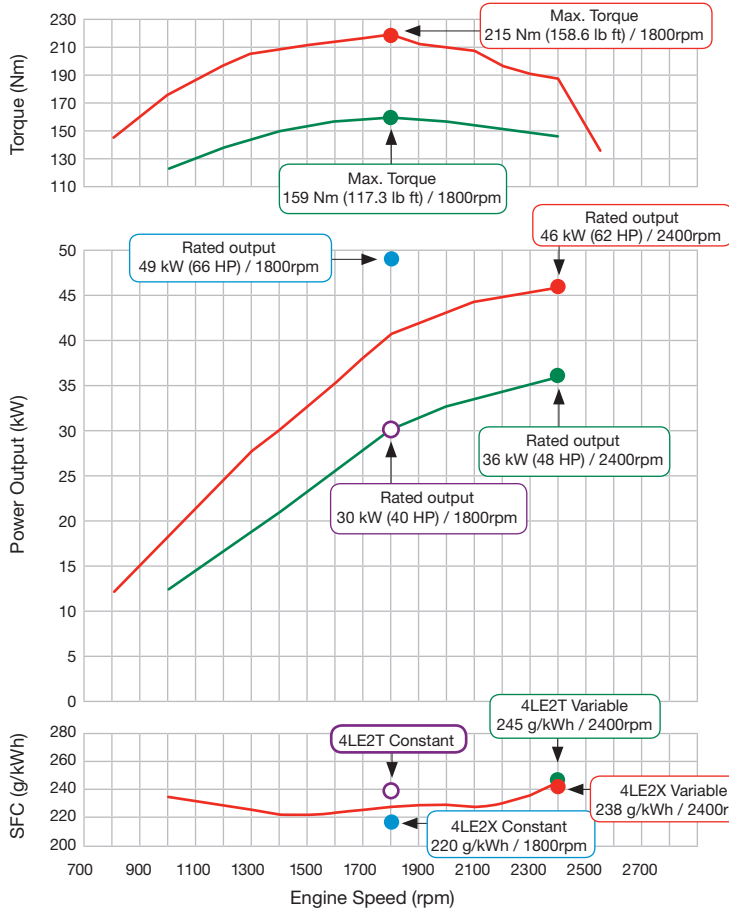

Standard


- Emission Control Device, maintenance free
- DOC
- Other emission-reducing features, including Cooled EGR, Wastegate Turbocharger
- High pressure Common Rail and Direct Injection
- Electric & self-priming fuel lift pump
- Glow plug starting aid
- 5-year / 5,000-hour warranty
- 500-hour oil drain & service interval

Available Options

- Side or bottom drain oil pan
- SAE A Gear Case PTO
- Flywheel housings: SAE #4, #5, or flat plate
- Cooling packages
- Air cleaners
- Meter board and wire harness
- Engine mounting
- Weather and sound-proofing enclosure


Engine Performance Curves

- 4LE2T – Constant Speed
- 4LE2T – Variable Speed
- 4LE2X – Constant Speed
- 4LE2X – Variable Speed

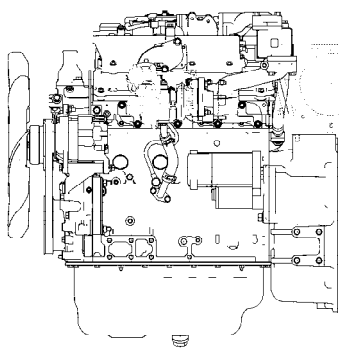


4LE2T: 29.80 in. (758 mm)


Note: SAE #4 flywheel housing shown (largest)

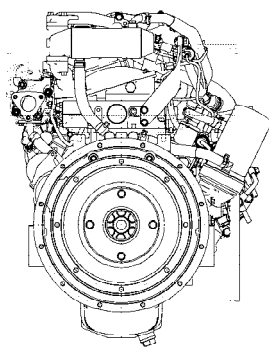

4LE2T: 30.40 in. (773 mm)

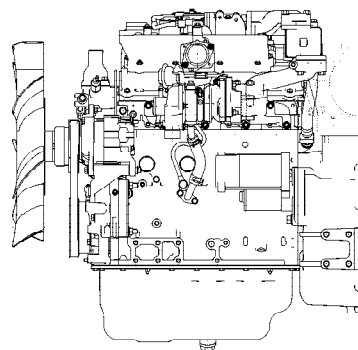

4LE2X: 31.60 in. (803 mm)

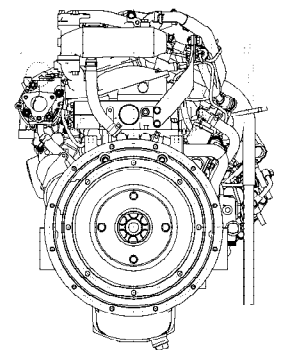

4LE2X: 23.05 in. (585 mm)

For additional information, please contact your local distributor or visit isuzuengines.com

Isuzu Motors America, LLC
46401 Commerce Center Drive
Plymouth, Michigan 48170
Phone: 734.582.9470
Fax: 734.455.7581

ILS-4LE2T/X-017-2

ISUZU
DIESEL

isuzuengines.com