FIGHTER FK1125

MY19 · 4x2 · MANUAL





GVM: 11,000kg



Power / Torque: 184kW / 761Nm



- 30,000km service intervals
- Isringhausen driver's seat
- **NEW** 5yr / 300,000km Warranty (T&Cs inside)
- Low-height chassis
- Full air brakes for safety
- Limited Slip Differential



SPECIFICATIONS - FIGHTER FK1125

MODEL

WHEELBASE (mm)

GVM (kg)

GCM (kg)

4x2 FK1125 TIPPER

6 SP. M

MAN STEEL SUSP.

FK62FHY1RFAC(T)

4,270 (H)

Universal Joint

11,000

20,000


ENGINE	
Engine Version	FUSO 6M60-9AT1 Diesel
Configuration	6 Cyl. In-line OHC, 4-Valve
Туре	Variable Geometry Turbo Charged Air to Air Intercooler
Displacement	7.5 litre (7,545cc)
Power ECE Nett	177kW @ 2500rpm
Torque ECE Nett	745Nm @ 1400rpm
Power (JIS Gross)*	184kW (250ps)@ 2500rpm
Torque (JIS Gross)*	761Nm (561lb/ft) @ 1400rpm
Maximum Engine Speed (rpm)	2900
Compression Ratio	16.0:1
Cooling System/Oil Cooler	Water cooled with Viscous fan, 23.0L capacity. Engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Cold Start Preheat	Standard
Emission Control	Selective Catalytic Reduction (SCR) After-Treatment System (BlueTec), Positive Crankcase Ventilation (PCV)
Emission Level	EURO 5 (ADR 80/03)
*Calculated	

ELECTRICAL	(continued)
Voltage	24V Negative Earth
Alternator Capacity	24V-80 amp
Battery Specification	Heavy Duty 2 x 12V, 100Ah/20hr
Headlamp Type	Halogen 2 x 70W/75W

CLUTCH	
	Manual
Clutch Model	FUSO C7M38
Туре	Single Plate Cerametallic 380mm
Operation/Specification	Air Assisted Hydraulic

TRANSMISSION	
	Manual
Version	FUSO Manual M070S6-OD
Type/Speeds	6 with Air Assisted Gearshift
Features	Synchromesh 2nd-6th
Ratios	1st: 6.807 2nd: 4.172 3rd: 2.396 4th: 1.504 5th: 1.000 6th: 0.774 Rev. 6.807
PTO Opening	LH Side

6M60-9AT1



PROPELLER SHAFT	
	Manual
Туре	P10

Needle Roller

FRONT AXLE	
Axle	FUSO F500T "I" Beam
Design Capacity (kg)	5,000
Max Operating Capacity (kg)	4,480

FRONT SUSPENSION	
Туре	Taper Leaf spring with Stabiliser Bar and Double Acting Shock Absorbers
Size (mm)	1,300 x 70

FUEL	
Injection System	DENSO Common Rail System Electronically Controlled Direct Injection
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity (L)	200
AdBlue Exhaust Fluid Capacity (L)	25

REAR AXLE	
Axle	FUSO D052 Full Floating Hypoid + Limited Slip Differential
Design Capacity (kg)	9,500
Max Operating Capacity (kg)	8,480
Ratio	Manual: 4.625:1

SPECIFICATIONS - FIGHTER FK1125

REAR SUSPENSION	
Туре	Steel Suspension
Details	Multi Leaf spring with Stabiliser Bar
Size Main Leaves (mm)	1,300 x 70
Size Helper Leaves (mm)	900 x 70

ize Helper Leaves (mm)	900 x 70
STEERING	
ower Assisted	Tilt/Telescopic Adjustable Steering Wheel
BRAKES	
ype	Full Air, Dual Circuit, FUSO Taper Roller, Automatic Brake Adjustment, ABS
SD(T ·· C · I)	V

Туре	Full Air, Dual Circuit, FUSO Taper Roller, Automatic Brake Adjustment, ABS
ASR (Traction Control)	Yes
Size Front / Rear (mm)	370 x 150
Park Brake	Rear Wheel Spring Actuated
Auxiliary	Exhaust Brake
Compressor	Water Cooled, 340cc Single Cylinder with Air Dryer

WHEELS AND TYRES					
Wheel Type	7, Single Piece Disc				
Wheel Size	19.5 x 6.75DC-147-13t				
Wheel Stud Pattern	8 Stud 275mm PCD ISO				
Tyre Size All	245/70R19.5				
Spare Tyre Carrier	Provided				

CHASSIS	
Туре	Parallel Channel
Size (mm)	230 x 80 x 7.0
Width (mm)	844

Refer to the bodybuilders guidelines on the Fuso website (www.fuso.co.nz) before mounting a body or modifying the chassis

INSTRUMENTS						
Gauges	Speedometer with Odometer, Tachometer, Air Pressure (2), Fuel Level, Water Temperature					
Colour Information	Fuel Consumption, Service Indicators,					

STANDARD F	EATURES					
Airbag	Driver's Air Bag and Seat Belt Pre-tensioner					
Hill Start System Yes						
Cab Cooling and Heating Air Conditioner/Heater/Demister						
Accessory Power	24V Accessory Power Outlet/Cigar Lighter					
6.2" Touchscreen Media Unit	AM/FM/DAB + USB + AUX, Apple Carplay / Android Auto, Wi-Fi Enabled for Internet Radio, Bluetooth, 32GB Storage Capacity, HD Infrared Reverse Camera (see options)					
Driving	Keyless Central Locking, Electric Windows, Cruise Control, LH Transom Window, Cup Holders (4), Rear Quarter Glass, Fluorescent Cabin Lamp and Interior Reading Lamps, Engine Idle Speed Control					
Storage	Centre Seat Storage Console, Rear Bunk Storage Pocket, Dash Storage Tray 2 DIN Glove Compartment, 1 Single and 1 Double DIN Slot for Accessories, Overhead Storage Pocket with Lid, RH Door Storage Pocket					

ST	ANDARD FEATURES	(continued)		
Cab: Ext	Cab: External Roof Mounting Points (max. static load 70kg) Front End-Outline Marker Lamps			
Chassis	Mounted Tool	Box, Reverse Warning Buzzer		

CAB FEATU	RES						
Туре	All Steel Forward Control, Manual Tilt 44 deg.						
Mounting	Hydroelastic Susp. 4 Point						
Colour	Natural White (W31)						
Interior	Fully Trimmed						
Windscreen	Laminated Tinted						
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles						
Door	90 degree Opening Angle						
Rear Vision Mirrors	Remote/Heated with Convex Spotter (Both Sides)						
Seating Capacity	3						
Seat Belts	2 ELR Lap Sash, 1 Lap						
Seat (driver)	ISRI Air Susp. + Auto Levelling, Height, Tilt, Lumbar, Bolster and Dampening Adjust, Integral Headrest, Fabric Trim						
Seats (passenger)	Centre: Low Back with Fabric Trim and Forward Folding LH Passenger: Fixed Base with Reclining Seat Back, Integral Headrest and Fabric Trim						

SERVICE INTERVALS

30,000km full service / 15,000km safety inspection

30,000km full service intervals, depending on application/use.

15,000km safety inspection, with greasing, required for reliability and to maintain warranty cover.

WARRANTY

5 years / 300,000km

Simply have your vehicle serviced at an authorised FUSO Service Centre, at the recommended servicing intervals, and you are covered by an additional 2 year / 150,000km FUSO warranty on top of the first 3 years / 150,000km. That's a total of 5 years / 300,000km cover.

Tipper body covered by 12mth / unlimited km warranty.

Refer to terms and conditions in the FUSO warranty booklet for full details.

OPTIONS

Additional Cameras for Media Unit (up to 4) Truck Specific GPS Navigation Reverse Sensors Tyre Pressure Monitoring System (up to 36 tyres) Wireless Phone Charging Pocket

	0							
٠.	_	,	24.	`				

NEW

PERFORMANCE Manual Turning Circle (kerb to kerb - metres) 15.2 Electronically Speed Limited to (km/h): 100 Engine Speed (rpm) at 90km/hr (top gear) 2,050 Gradeability at Rated GVM (theoretical)* Gradeability at Rated GCM (theoretical)*

Accessories, Overhead Storage Pocket with Lid,	Theoretical performance only. Actual performance may vary under different conditions
RH Door Storage Pocket	


KERB WEIGHTS AND MAX AXLE LOADS (kg)								
	Vehicle F	Ratings**	Max Axle Loadings**		Kerb Weights*			
Model		GVM	GCM	Front	Rear	Front	Rear	Total
4x2 FK1125 Tipper 6 Sp. Man Steel Susp.	FK62FHY1RFAC(T)	11,000	20,000	4,480	8,480	2,610	2,480	5,090

^{*} Weights (est.) includes 10L fuel and spare wheel and are subject to 2.5% variation (+/-) ** Vehicle ratings and max axle loadings may be limited by local regulations.

SPECIFICATIONS - FIGHTER FK1125

DIMENSIONS (mm)		
Wheelbase	4,270	
Length Overall	6,995	
Height Overall	2,480	
Width Overall	2,280	
Width Rear Axle	2,280	
Width Front Track	1,780	
Width Rear Track	1,710	
Width Frame	844	
Height Frame at Rear Axle	920	

REAR BODY	
Туре:	Tipper Body
Body Capacity (m³):	3.5
Inside Body Dimensions (mm):	
Length x Width x Height	4,000 x 2,060 x 430
Floor Height From Ground to Rear Deck Floor	1,215
Thickness : Floor	4.5
Front, Side & Tailgate Panel	3.2
Sides and Tailgate Operation	Drop sides with two-way tailgate hinging at the top & bottom
Tipping Mechanism:	Under body hydraulic cylinder with link
Tipping Performance: Tip Angle (deg)	50
Lifting Time (sec)	20
Lowering Time (sec)	20

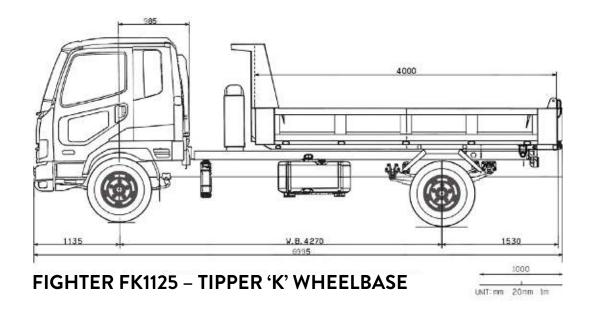

Scale = 1:50 (20mm = 1 metre). This scale is accurate when used on the original spec sheet, be aware that enlarging these illustrations can alter the scale and cause incorrect measurements. Fuso New Zealand and its authorised dealers always recommend customers seek professional advice from independent sources before commencing any engineering activities.

A policy of continual improvement means that specifications detailed in this brochure are subject to change without notice. Contact your authorised Fuso dealer to confirm current specifications. Fuso is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © Fuso NZ (2019)

