

Specification Guide

FVR 165.30 FVD 165.30 / 120.30

Weight Rating

GVM	16,500 / 12,000 kg
GCM	20,000 / 15,500 kg

Engine

Power	221 kW @ 2,200 rpm
Torque	981 Nm @ 1000 - 2100 rpm

Transmission

9 speed manual transmission (MT)

6 speed automatic transmission (AT)

Wheelbase

4,660 mm 6,000 mm

Key Features

- ADR 80/04 (Euro VI) Compliant
- Advanced Emergency Braking (AEB)
- Full Speed Adaptive Cruise Control (FACC)**
- Electronic Stability Control (ESC)
- ECE-R29 cab with side anti-intrusion beams
- Bi-LED Headlamps with Daytime Running Lamps



Truck Finder

Scan to search, view and download full spec sheets for all Isuzu truck models.




^{**} Automatic transmission only



Engine

Description	Isuzu DB6A-TCC
Туре	6 cylinder
Power	221 kW (300PS) @ 2,200 rpm (DIN NET)
Torque	981 Nm @ 1,000 - 2,100 rpm (DIN NET)
Displacement	6,690 cc
Bore x Stroke	107 mm x 124 mm
Induction	Turbocharger with air-to air intercooler
Fuel Injection	Direct injection high pressure common rail system
Emission Standard	ADR 80/04 (Euro VI) compliant
Emission Control	SCR (Selective Catalytic Reduction) DPD (Diesel Particulate Diffuser).
Auxiliary Brake	Engine Compression Brake (I-Brake)

DB6A-TCC 300PS Euro-VI

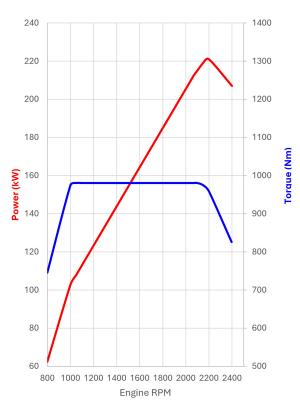

Transmission

	Description: ISUZU MEB-9									
	Type: 9 speed with synchromesh on gears 1-8									
	Ratios	:								
MT	Crawler	1	2	3	4	5	6	7	8	REV
	10.340	7.125	5.187	3.750	2.682	1.900	1.383	1.00	0.715	9.015
	Power counter		f Facility	r: Provis	ion on L	.HS of tr	ansmiss	ion cas	se. Drive	from
	Descrip	otion: All	ison 35	00 GEN	16					
	Type: 6	speed	automat	tic						
	Ratios	:								
AT	1	2	3	4	5	6	REV			
	4.59	2.25	1.54	1.00	0.75	0.65	5.00			
	Power ⁻	Take Of	f Facility	r: LHS a	nd top c	peninas	s on tran	smissio	on bellho	ousina.

Engine driven PTO drive gear.

Clutch

MT Type: Single plate

Clutch Plate Diameter: 381 mm

Intelligent Safety

(COSS)

intelligent Salety	
	Advanced Emergency Braking (AEB)
	Adaptive Driving Beam (ADB)
	Anti Lock Braking System (ABS)
	Anti Skid Regulator (ASR)
	Attention Alert System (AAS)
	Auto Lighting System (ALS)
ACTIVE	Cab Tilt Warning (CTW)
SAFETY	Customisable Speed Limiter (CSL)
ADVANCED DRIVER ASSISTANCE SYSTEMS (ADAS)^	Distance Warning System (DWS)
	Electronic Stability Control (ESC)
	Forward Collision Warning (FCW)
	Full Speed Adaptive Cruise Control (FACC)**
	Intelligent Speed Limiter (ISL)
	Lane Departure Warning (LDW)
	Traffic Movement Warning (TMW)
	Traffic Sign Recognition (TSR)
	Door Mounted Cornering Lamps
PASSIVE	Driver and Front Left Hand Passenger Seatbelt Pretensioners
SAFETY	Driver and Front Passenger Airbags
CABIN OCCUPANT SAFETY SYSTEMS	ECE-R29 Cab with Side Anti-Intrusion

Accessories

Protection Isuzu Seat Covers Isuzu Floor Mats Isuzu Dash Mats Isuzu Weathershields		•
Protection Isuzu Dash Mats		•
Isuzu Dash Mats)vataatia n	•
Isuzu Weathershields	rotection	•
		•
Isuzu Mudflaps		•
Technology Isuzu Cameras	echnology	•
Aerodynamics Air Deflectors	erodynamics	•
Warning Triangles •		•
Safety Wheel Nut Indicators •	Safety	•
Signage •		•

 $^{^{\}star}$ Expected to be available October 2025

• Fitted as Standard • Option to Fit Some options are provided via 3rd party retailer. Please discuss with your local Isuzu dealer.

** Automatic transmission only

Overhead storage compartments

Beams

with doors.



Cabin Features

General Features

Engine Access	Electro-hydraulic cab tilt to 45 degrees
Steps	Heavy duty anti slip steps
Doors	70° opening internally reinforced front doors
Mirrors	Heated & powered exterior main mirrors with flat glass and additional independently adjustable convex "spot" mirrors
Wipers	Auto windshield wiper system, wet wipers
	BI-LED Headlamps with Adaptive Driving Beam (ADB) and Daytime Running Lamps
Exterior	Roof mounted clearance lamps
Lighting	Front LED foglamps
	LED tail lamps
Audible Warning	Reverse alarm
Front Bumper	3-piece resin, body coloured
Security	Passive Entry and Start System (PESS) with remote Central locking and Immobiliser

Premium Isuzu Audio Visual Unit

Connectivity	Bluetooth
	USB socket
	WiFi with over-the-air updates
	Input for up to 6 High Definition (HD) cameras (available accessory)
Radio	AM / FM
Screen Type	8" High Definition with capacitive touch
	Wireless Apple CarPlay®
Smartphone Integration ⁺	Wireless Android Auto™
mogration	Wi-Fi connectivity
Navigation	Provided via smartphone application

CarPlay is a trademark of Apple Inc. Android Auto is a trademark of Google LLC.







Cabin Interior

Auto control
Electric control
Door and roof pillar mounted
LED door open lamp. Bright LED room lamp
24V
3-point lap sash seatbelts in all outboard seating positions. Centre seat lap belts.
Isri 6860/875 NTS2 air suspension driver's seat with heating and ventilation
LH passenger bucket seat, plus centre seat with folding seat back and storage compartment.
Tilt / telescopic adjustable
Overhead shelf, two cup holders, front door pockets

Driver Control

	Full speed adaptive cruise control**
Engine	DPD manual regeneration switch
	Idle speed control
General Controls	Auto windshield wiper system, wet wipers, washers, engine brake and turn signals
Safety Systems	AEB on/off, DWS on/off/sensitivity adjust, LDW on/off/sensitivity adjust, TMW on/off, ESC&ASR on off, headlamps and ALS on/off.
Steering Wheel Controls	Multi Information Display controls Audio Visual volume control Audio Visual seek controls Phone control ADAS controls
** Automotio transmission	

^{**} Automatic transmission only

Instrumentatio	n
	Digital odometer with integrated dual tripmeters
General Instrumentation	Engine coolant temperature and fuel level gauges
	Speedometer and tachometer
	Adjustable vehicle speed warning
	AEB, FCW, DWS, LDW, TMW systems activation alerts
Multi	CTW indicator
Information Display	Hourmeter
. ,	Low fuel and AdBlue level alerts.

Vehicle systems status

Auto windshield wiper system mode (TBC)



Chassis

Suspension

		Single stage alloy steel taper leaf spring
Front		Double acting hydraulic shock absorbers. Stabiliser bar.
	FVR	Type: Multi-leaf springs
Daan		Description: Hendrickson HAS230
Rear	FVD	Type: Airbag
		Capacity: 11,500 kg

Fuel Tank

	Type: Frame mounted steel						
Diesel Tank	Maximum capacity ² : 200 L with fuel cooler						
	Fuel cap: Lockable cap						
AdBlue [®] Tank	Type: Frame mounted high-density polyethylene tank						
	Maximum capacity ² : 65 L						

Electrical Systems

Туре	24 volt
Alternator	90 amp
Battery	2 x 115E41L (651 CCA) batteries connected in series

Chassis Frame

Туре	TBC
Material	HT540
Dimensions	Side rail (mm): 90 x 275 x 7.5 Rear frame width (mm): 870

Axles

	Description: Meritor MFS73						
Front	Type: Reverse Elliot I-beam						
	Capacity: 7,300 kg						
Rear	Description: Meritor MS-11-165						
	Type: Single drive						
	Capacity: 11,500 kg						
	Ratio: 5.625 except FVR MT: 4.888						

Wheels & Tyres

	Rear axle tyre rating: 11,600 kg						
Rear	Tyres: 275/70R22.5 148/145L						
	Wheels: 22.5 x 8.25 ten stud steel wheels						
Front	Steer axle tyre rating: 6,300 kg						
	Tyres: 275/70R22.5 148/145L						
	Wheels: 22.5 x 8.25 ten stud steel wheels						

Brakes

Туре	Full air dual circuit, disc brake with EBS
Diameter Front	434 mm
Diameter Rear	434 mm
Park Brake	Spring park brake acting on all rear wheels



Weights & Dimensions


Weights (kg)

Models	Rating	gs³		g Limit³ ound)	Cab (Chassis W	Model Code	
	GVM	GCM	Front	Rear	Front	Rear	Total	
FVR 165.30 MT R47	16,500	20,000	6,600	11,500	TBC	TBC	TBC	FV2660
FVR 165.30 AT R47	16,500	20,000	6,600	11,500	3,533	2,210	5,743	FV2661
FVD 165.30 AT R60	16,500	20,000	6,600	11,500	3,663	2,108	5,771	FV2672
FVD 120.30 AT R60	12,000	15,500	6,600	11,500	3,663	2,108	5,771	FV2662*

^{*}De-rated model code. Dealer should order original model code and request de-rate upon arrival

Dimensions (mm)

Models	WB	OAL	FOH	ROH	CA	RT	ORT	СН	FFH (Unladen)	RFH (Unladen)	E1 11	Turning Circle Kerb to Kerb (m) ⁵
FVR 165.30 MT R47	4,660	8,005	1,255	2,090	3,675	1,840	2,450	2,866	TBC	TBC	TBC	17.11
FVR 165.30 AT R47	4,660	8,005	1,255	2,090	3,675	1,840	2,450	2,866	1,019	1,107	1,147	17.11
FVD 165/120.30 AT R60	6,000	9,355	1,255	2,100	5,015	1,840	2,450	2,863	1,016	1,011	1,009	22.03

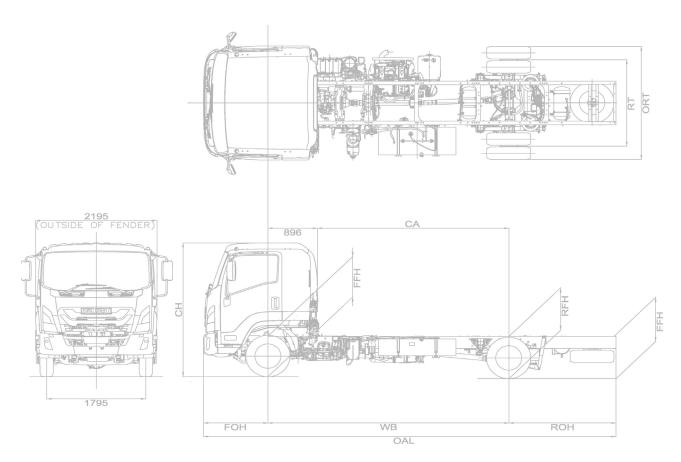

Cab Chassis drawing not representitive of model

Service & Support





Dealer Network

Service & Support National Isuzu Truck Dealer Network and Accredited Service Centres


Find a Dealer Online

Find your local dealer Scan QR Code



Warranty#

Chassis	5 Year Warranty#							
	350,000 km#							
Genuine Parts & Accessories	2 Year Warranty or 50,000km# (When installed by an Isuzu Trucks Approved Dealership - Including Labor)							

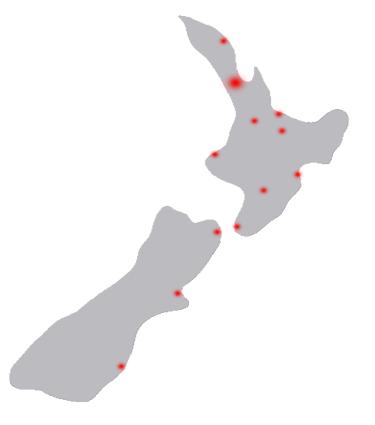

NOTE: This specsheet is PRELIMINARY ONLY. Additional spcifications will be added at a later date. Existing specifications may change.

^{*}Total 5 Year Warranty, including Base Warranty (36 months / 200,000kms) and Additional Warranty (24 months / 150,000kms), cover is 60 months or 350,000kms, whichever comes first. To qualify for Additional Warranty, all scheduled servicing during the Base and Additional Warranty periods (ie. the total 60 months) must be performed by an authorised Isuzu service dealer from the date of delivery to the first customer. If scheduled servicing is performed by unauthorized service providers, only the Base Warranty will apply. Tipper bodies are excluded from Additional Warranty. These are covered by Base Warranty only.

2 As shown on fuel tank. Volume of fuel that can be added to a near-empty tank will vary according to operating conditions.

3 Vehicle ratings and axie weight limits are subject to government regulatory requirements and weight distribution analysis. Consult your Isuzu dealer to select the correct vehicle for your specific application.

4 Cab chassis only as supplied and including 100% fuel, 100% AdBlue, tools, and spare wheel (if applicable).

5 Turning circle dimensions are based on manufacturers calculations and may vary under real-world conditions.

The information in this spee sheet was correct at time of printing, but all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost. Isuzu New Zealand (INZ) may make changes at any time without notice, in prices, colours, materials, equipment and models. INZ makes all reasonable attempts to ensure the availability of all vehicles and equipment. The information in this spee sheet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and vehicle / equipment availability upon request. To the extent permitted by the law, INZ is not liable to any person as result of reliance on the content of this spec sheet.

Advance Driver Assistance Systems are intended to support the driver but are not a replacement for safe driving practices.

Sma

