

# EXY530



# 6x4


MODEL	EXY530
GVM (Kg)	24,000
GCM (Kg)	55,000
Max Power (kW)	390
Max Torque (Nm)	2255
Wheelbase (mm)	4300
Suspension	Air



\*\*EXY460 shown

ENGINE			
Engine Model	ISUZU 6WG1 - TCS	Type	6 cyl 24 valve, SOHC
Displacement	15,681cc	Compression Ratio	16.0:1
Max Power (DIN Nett)	390 kW (530 HP) @ 1800 RPM		
Max Torque (DIN Nett)	2255 Nm (1663 lb.ft) 900-1,300rpm		
Emission Control System	Euro V with Selective Catalytic Reduction, (SCR)		
Fuel System	Electronically controlled Denso Direct Injection, high pressure common rail, 400 litre rectangular alloy fuel tank with lockable fuel cap. 75 litre ABlue tank		
Air Intake System	Turbo charged, inter-cooled, vertical intake, horizontal outlet		

Engine Performance Curve 6WG1 TCS

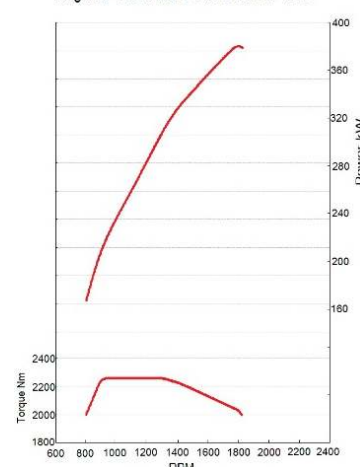

CLUTCH		PERFORMANCE		
Manual	15.5" TWIN PLATE with Eaton Transmission	RPM @90km/h: 1440 (man), 1600(AMT)	Speed Limit:	Customisable
ISUZU AMT	15.5" TWIN PLATE	Low Speed Gradeability @GCM (lowest forward gear, no wheel slip)		51%

TRANSMISSION	
Manual	Eaton Road Ranger 18-speed constant mesh RTLO18918B
Gear ratio (:1)	1st 14.40, 2nd 12.29, 3rd 8.56, 4th 7.30, 5th 6.05, 6th 5.15, 7th 4.38, 8th 3.74, 9th 3.20 10th 2.73, 11th 2.29, 12th 1.92 13th 1.62, 14th 1.38, 15th 1.17, 16th 1.00, 17th 0.86 18th 0.73. Reverse: L/L 15.05 L/H 12.86, H/L 4.03 H/H 3.43
AMT option:	Isuzu MJX16 (Automated Manual), PTO opening Left side
Gear ratio (:1)	1st 14.01, 2nd 11.34, 3rd 9.93, 4th 8.03, 5th 6.84, 6th 5.53 7th 4.58, 8th 3.71, 9th 3.05 10th 2.47, 11th 2.16, 12th 1.75 13th 1.49, 14th 1.20. 15th 1.00, 16th 0.81 Rev 1: 12.58 Rev 2: 10.18

AXLES	
Front	ISUZU FO75, 7,500Kg capacity
Rear	ISUZU RT210, 21,000Kg capacity tandem drive with Inter-axle lock
Ratio	3.909:1, Hypoid 419mm diameter crown wheel & Integral oil pump
WHEELS AND TYRES	
<ul style="list-style-type: none"> <li>22.5 x 8.25 ten stud ISO standard Alcoa aluminium wheels.</li> <li>Front: 275/70R22.5 148/145</li> <li>Rear: 275/70R22.5 148/145</li> </ul>	

CHASSIS			
Suspension	Chassis	Brakes	Electrical & Steering
Front Suspension <ul style="list-style-type: none"> <li>Alloy steel tapered parabolic leaf springs shock absorbers with stabiliser bar</li> </ul> Rear Suspension <ul style="list-style-type: none"> <li>Isuzu 4-bag air suspension, stabilizer bars on both axles.</li> <li>Shock absorbers on both axles</li> <li>Remote hand control to adjust suspension height auto return to factory-set ride height after 20km/hr</li> </ul>	<ul style="list-style-type: none"> <li>Rolled steel channel, cold riveted ladder frame</li> <li>Rail dimensions 285 x 85 x 7 mm</li> <li>HT540 weldable steel</li> <li>Frame width 850mm, 950mm at engine/trans</li> <li>Inner frame reinforcement at suspension mounts</li> </ul>	<ul style="list-style-type: none"> <li>Dual circuit air brakes with EBS.</li> <li>410mm diameter brake drums</li> <li>Front linings 160mm wide, Type 24 brake chambers</li> <li>Rear linings 220mm wide Type 24/30 brake chambers</li> <li>Trailer brake hand control</li> <li>Isuzu Air controlled exhaust brake</li> <li>Isuzu Giga X-Tard permanent silent magnet drive shaft retarder.</li> </ul>	<ul style="list-style-type: none"> <li>24 volt negative earth system</li> <li>60-amp alternator</li> <li>Batteries - 2 x N120, 660 CCA @ 18°C</li> </ul> Steering: <ul style="list-style-type: none"> <li>Power assisted recirculating ball with integral power assistance.</li> <li>Gear Ratio 20.2:1</li> <li>Steering angle: Inner (Outer)45° (35°)</li> </ul>

EXY530



6x4

June 19

## CAB AND INTERIOR

Cab Exterior	Cab Interior	Instruments and Controls
<ul style="list-style-type: none"> <li>All steel construction, High-roof, high tensile steel on cab under-frame with side impact beam reinforcement</li> <li>Cab strength equivalent to ECE-R29 standard</li> <li>Power cab tilt to 48° with manual hydraulic back-up</li> <li>4 point electronically controlled air bag cab suspension</li> <li>Enclosed non-slip cab entry steps with RH step light</li> <li>Door mounted 22" heated power main and convex mirrors</li> <li>LH side kerb and front under-view mirrors</li> <li>External-access equipment locker on left side of cab</li> <li>Steel front bumper integral head lamps, fog lamps and indicators</li> <li>Halogen multi-reflector headlamps,</li> <li>Roof-mounted outline marker lamps</li> <li>Reverse alarm buzzer standard</li> </ul>	<ul style="list-style-type: none"> <li>Driver's seat - ISRI 6860 air suspended, pneumatic lumbar support, height, rake, auto weight adjustment seat for occupant mass up to 150kg</li> <li>Front passenger adjustable bucket seat</li> <li>3-point seat-belts on both seat positions, driver's seat fitted with SRS</li> <li>pre-tensioner, integral to the seat, SRS air bag on driver's seat</li> <li>Lined interior, padded roof lining and vinyl floor covers</li> <li>Door and pillar entry assist grips both sides</li> <li>Overhead storage locker with CB compatible slot</li> <li>Wireless phone charger for Qi enabled phones.</li> <li>Adjustable steering column, soft-feel urethane steering wheel with audio controls.</li> <li>Electric windows</li> <li>Central locking with keyless entry and engine immobiliser</li> <li>Air conditioning with redirect to sleeper</li> <li>Two 12V 100W accessory power outlets and 24V cigarette lighter</li> <li>Centre console with storage locker, fold-over storage tray and two storage ports/cup holders</li> <li>Multimedia unit with 6.2" LCD touch screen. Android OS. DAB+ digital radio, integrated Bluetooth with voice recognition. Inbuilt media viewer. Internet radio via smartphone. 32GB file storage. USB &amp; auxiliary inputs.</li> <li>OPTIONS: (full details from your Isuzu dealer): Telematics system. Supports up to five camera inputs one being digital camera, reversing sensors. Tyre pressure monitoring.</li> </ul>	<ul style="list-style-type: none"> <li>Speedometer with digital odometer and trip meters</li> <li>Engine coolant temperature, fuel and AdBlue gauges, dual brake air pressure gauges</li> <li>Two-speed wipers with variable intermittent wipe function</li> <li>Differential lock switch with "Engaged" light</li> <li>Idle speed adjustment switch</li> <li>Giga-Tard progressive engagement switch</li> <li>LH combination stalk: windscreen wipers/wash control, hazard lamps, X-Tard exhaust brake, Giga-Tard on/off</li> <li>RH combination stalk: Indicators, lights &amp; fog lamp switch, headlamp dip switch, cruise control set/resume/cancel</li> <li>Multi Display provides: Clock, calendar, fuel consumption data including total economy and fuel consumption, trip distance, trip economy and fuel consumption (when moving), Idle consumption (when stationary), battery voltage.</li> <li>Multi info display warnings include: Engine overheat, low coolant level, low oil pressure, low fuel level.</li> </ul>

## WEIGHTS (KG)

Model Codes	Models	Ratings*		Loading Limits (at ground)*		Chassis Cab Tare Mass**		
		GVM	GCM	Front	Rear	Front	Rear	Total
EX0415	EXY530 MT	24000	55000	6000	15000	4512	3234	7746
EX0315	EXY530 AMT	24000	55000	6000	15000	4524	3270	7794

\* Vehicle ratings and front and rear mass limits are subject to regulatory requirements – Consult your dealer to select a specific vehicle to suit your requirements

\*\* Chassis cab as supplied from the factory including 10 litres of fuel

## DIMENSIONS (mm)

\*Unladen condition

Turn Circle (m)

Models	WB	OAL	OAH*	FOH	ROH	CA	RI	CE	RFH	outer rear track	cab width	kerb to kerb
EXY530	4300	7720	3284	1400	1520	3500	1310	5011	963	2485	2490	15.0

## WARRANTY

Full vehicle warranty: 36 months or 250,000 kilometres whichever occurs first  
All warranty is subject to terms and conditions as detailed in the Owner's Manual Service and Warranty Supplement

A policy of continuous improvement means that these specifications are subject to change without notice. Contact your Isuzu dealer or visit our website at [Isuzu.co.nz](http://Isuzu.co.nz) to confirm specifications. Images of vehicles are representative only and may differ slightly from the actual vehicle.

