


# ENDURO FJ2528



<b>Model code</b>	FJX3WK2RFBA
<b>Configuration</b>	6x4
<b>GVM</b>	25,000kg
<b>GCM</b>	36,000kg
<b>Axle GVM ratings</b>	Front: 6,600kg Rear: 19,000kg
<b>Kerb weight (10L fuel)</b>	Front: 4,050kg Rear: 3,860kg Total: 7,910kg
<b>Engine</b>	OM906, 6.4L, 6 Cylinder
<b>Power/torque</b>	285hp (210kW) @ 2200rpm / 1120Nm @ 1200-1600rpm
<b>Live Drive PTO</b>	Output Torque: 600Nm Ratio: 1:07 x engine speed

<b>Transmission</b>	9 spd G131 Manual Synchromesh Ratios: 14.57 - 9.48 - 6.64 - 4.82 - 3.67 - 2.59 - 1.81 - 1.32 - 1.00 : R - 13.86
<b>PTO (Std)</b>	Output Torque: 700Nm Ratio: 1.357 @ 1700rpm
<b>Axles</b>	Front: Reverse Elliot (6,600kg) Rear: Full Floating with Diff Lock and Cross Locks (11,000kg x 2); Ratio : 4.778 : 1
<b>Suspension</b>	Front: Parabolic with Anti Roll Bar Rear: Multi Leaf, Tandem Bogie with Torque Rods and Anti Roll Bar
<b>Brakes</b>	Full Air S Cam with Auto Brake Adjustment and ABS Auxiliary: Exhaust Brake and Engine Brake
<b>Tyres</b>	295/80R22.5
<b>Wheels</b>	8.25" x 22.5" 10 Stud ISO
<b>Fuel</b>	290L + 60L Ad Blue
<b>Electrical</b>	24Volt / 80Amp Alt
<b>Performance</b>	90km/hr speed limited; Max gradability = 70%


## OM906

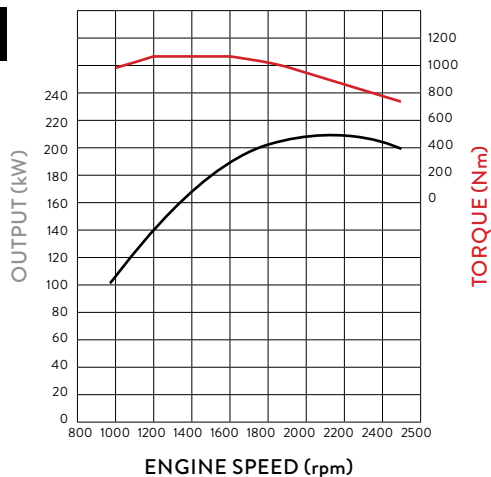

### 3 Seat Cab

All Steel Forward Control Tilting Day Cab  
Arctic White (AW1)  
Air Suspended Driver's Seat with Integral Seat Belt  
ELR 3 Point with Centre Lap Belt & Driver's Seat Belt Reminder  
Air Conditioner / Heater / Demister  
12V Accessory Power Outlet  
Radio AM/FM + USB + AUX  
Central Locking / Electric Windows  
Dual Door Mirrors + LH Front and Side Safety Mirrors  
Speedo, Tacho, Air and Fuel Gauges  
Ad Blue Level, Engine Hours, Fuel Consumption, Water Temperature  
Variable RPM Control

# ENDURO FJ2528

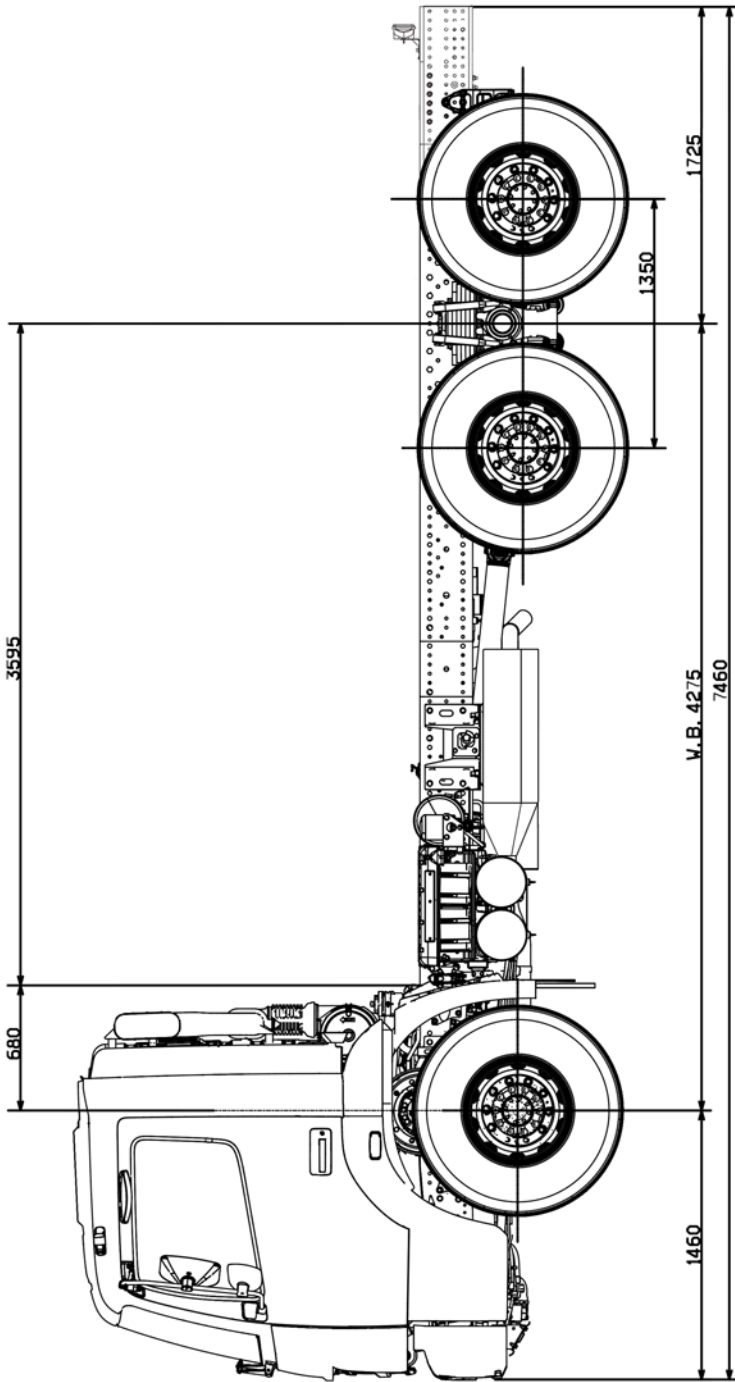

## DIMENSIONS

Wheelbase 4,275

Overall Length 7,460

Width 2,490

Height 2,930

Frame Height  
At Rear Axle 1,110

Rear Over Hang (ROH) 1,725

Front Track 2,045

Rear Track 1,805

Note: All dimensions are in mm